


408PE-412PE

經濟型(條碼)標籤機

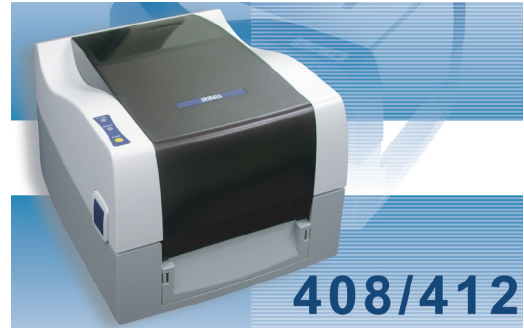

RING 400PE Series Specification

Model Name	408PEL	408PE	412PE
Print Speed	101.6mm/sec., 4"/sec	152.4mm/sec, 6"/sec	76.2mm/sec, 3"/sec
Resolution	203dpi	203dpi	300dpi
Interface	Serial, Parallel	Serial, Parallel, USB	Serial, Parallel, USB
Print Length	12mm to 1270mm	12mm to 1270mm	12mm to 574mm
Print Method	Thermal Transfer / Direct Thermal		
Media Width	25mm to 118mm		
Media Type	Roll Stock (continuous or die cut), Fan Fold, Tag Stock		
Supply Roll Capacity	127.0mm		
Print Width	104mm		
Media Thickness	.06mm to .30mm		
Media Sensing	Label gap, black mark, and punch hole sensing, by auto sensing or program command setting		
Ribbon	Industry standard : 25.4mm core diameter, 300m ribbon length – out side diameter of 64mm		
Cabinet	Durable plastic with Black transparent media window		
Bar Codes and 2 D codes	Code 39, Code 93, Code 128(Sub set A, B, C), UCC128, UCC/EAN-128, UPC A/E(add on 2&5), Interleaved 2 of 5, EAN128,EAN8/13(add on 2&5), Codabar, PostNET, DUN14, MaxiCode, HIBC, Plessey, RPS128, PDF417, Datamatrix, QR code		
Resident Fonts	9 Alphanumeric fonts including OCR A&B, 8 times expandable in X and Y direction, capable of rotation in 4 directions		
Graphic Handling	PCX, BMP files		
Printer Language	ALL command, Firmware down loadable		
Font Download	Windows Bitmap fonts and Asian fonts		
Memory	2MB Ram, 1MB Flash		
Interface transmission	Baud Rate 9600 ~ 115200, XON/XOFF, DSR/DTR		
Software	Window label making software, Windows drivers		
LED Display	2 LED, 1 Function key		
Power supply	External power supply 100/230VAC, 50/60Hz		
Operating Temperature	5 to 40 centigrade		
Humidity	30 to 85%, non-condensing. Free air		
Approval	CE, FCC Class A, CCC, CB, CUL, BSMI		
Dimensions	171mm H x 226mm W x 285mm D		
Weight	2.8Kg		
Options	Rotary cutter Stripper Module 1MB Flash Expansion Card + Real Time Clock 2 MB Flash Expansion Card + Real Time Clock Internal Ethernet Adapter Card		